



SDQ3T-W

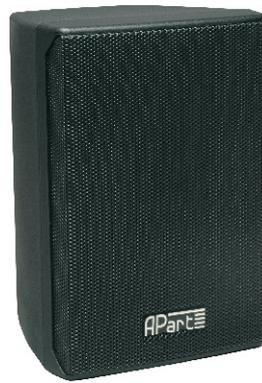

SDQ3T-BL

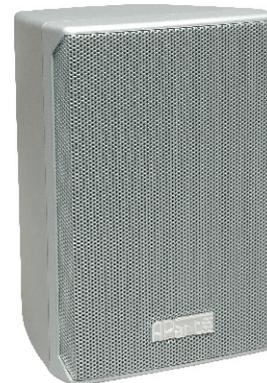

SDQ3T-SLV



The design of the SDQ3T loudspeakers will definitely become an established value in the contractor market. Its very small and discrete design is in perfect harmony with the transparent sound exhibited.

The SDQ3T loudspeakers are available in 3 different colours. The loudspeakers can be used in 16 Ohm or 100 Volt as they come with a build-in high quality transformer with several power tapings.

The loudspeaker is equipped with a swivel-ball bracket what allows you to tilt the loudspeaker and turn it into any direction. As the SDQ3T has the 1 step protection system build-in, the loudspeaker is protected from overloads.

TECHNICAL SPECIFICATIONS

Type	2-way HiFi Pro, sealed box
Cabinet	Enforced poly plastic
Woofer	3.2" CP type
Tweeter	1" mylar ferro cooled
Impedance	16 Ohm
Transfo Power Tappings	1.5 - 3 - 6 watt
RMS Power 16 Ohm	
AES Rated	35 watt
Music - Program	50 watt
Dynamic Peak (lo-cut)	70 watt
Protection system	Auto-Reset Guard
SPL 1 watt/1 m	86 dB
SPL Max peak	104 dB
Frequency Range	90 Hz - 20 kHz
Speaker connectors	Push terminals
Dispersion	120° H x 100° V
IP rating	50
Dimensions (H x W x D)	152 x 105 x 104 mm
Weight	0.85 Kg