




APart

APart PIR-FMIT
PRE-AMPLIFIER

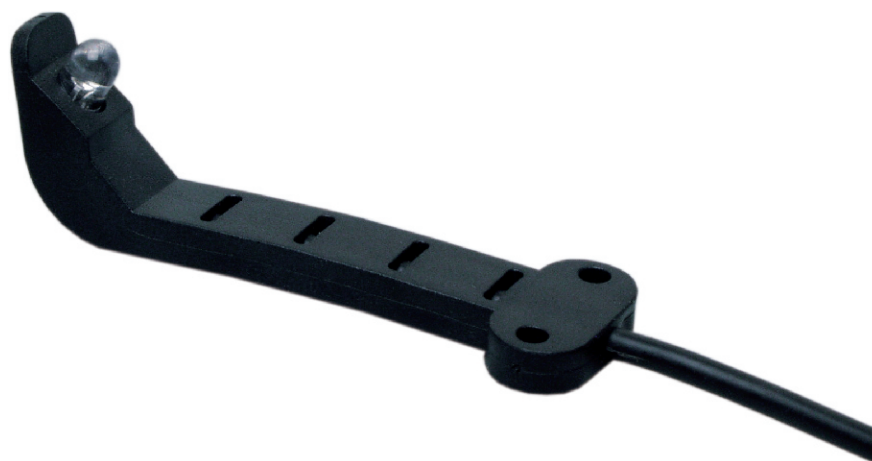

The PIR-FMIT is an IR emitter that can be used to prolongue the IR signal (1/1) to other devices like CD / DVD / Tuner / ..., via the PIR7600.

The PIR-FMIT comes standard with the PIR7600.

TECHNICAL SPECIFICATIONS

Material	Plastic
Connector	mono mini jack
Cable length	2 m
Dimensions (H x W x D)	65 x 20 x 18 mm
Weight	0.034 Kg (batteries included)



APart

TECHNICAL SPECIFICATIONS

Input	Line 1	Euro Block Balanced 0 dB, 20 kOhm
	Line 2-6	RCA Cinch, 500 mV, 10 kOhm
	Mic 1	Front: Jack balanced -50 dB / 600 Ohm Rear: Euro Block balanced -50 dB / 600 Ohm(Mic), -10 dB / 10k (Line), 0 dB / 600 Ohm(TEL)
	Mic 2	Front: Jack balanced -50 dB / 600 Ohm Rear: Euro Block balanced -50 dB / 600 Ohm
Output	Zone 1	Euro Block balanced 0 dB / 100 Ohm
	Zone 2	RCA Cinch 0 dB / 600 Ohm
Remote Power Output		Euroblock, 12V
Frequency Response		20 Hz to 25 kHz
Distortion		< 0.01%
IR Receiver		Mini jack, IR Eye included (Ref: PIR-REC)
IR Output		Mini jack, IR emitter included (Ref: PIR-EMIT)
Handheld IR remote control		Included (Ref: PIR-REM)
Wired remote control input		RJ45
Dimensions (H x W x D)		44 x 483 x 275 mm
Weight		3.5 Kg