


# User manual


## Color Tube

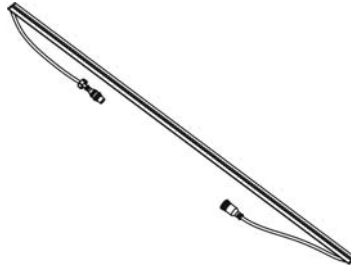

### 1. Attention:

- Do not install the module near high inflammable liquids or materials.
- Do not allow anything to rest on the module.
- Do not use the module near high humidity or water or expose to the rain.
- Do not install the module near the naked flames.
- Do not install the module in dirty, dusty or badly ventilated location.


### 2. Device connection:



Pin	Color	Function
1	Red	Red
2	Green	Green
3	Blue	Blue
4	White	24V +

### 3. Typical installation:

Please use an adapter cable to connect both terminal side of Color Tube, please make sure the signal input and signal output of Color Tube was link Color Commander correctly.

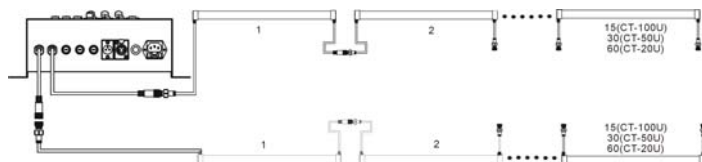

**CAUTIONS: Ensure the main power supply is off before installation**

### 4. Technical specifications:

- Max input current: 400MA
- Power consumption: 10W (CT-100U)  
5W (CT-50U)  
2.5W (CT-20U)
- Power supply: DC 24V

### 5. Maintenance

- Keep the module dry.
- Operate only in places where the sufficient air ow to cool the module is present.
- Periodically clean the front transparent cover. Use a moist, lint-free cloth. Never use alcohol or solvents!