

Beta10A Sealed Mid/High or Floor Monitor Box

By Jerry McNutt, Eminence Speaker LLC

Displacement Limited to 150 Watts; use above 125 Hz.

Box Properties

--Description--

Name:

Type: Closed Box

Shape: Prism, square

--Box Parameters--

Vb = 0.295 cu.ft

V(total) = 0.334 cu.ft

Qtc = 0.979

QL = 20

F3 = 113.3 Hz

Fill = heavy

Driver Properties

--Description--

Name: Beta-10 (8 ohm)

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised Sep-2002

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid paper dust cap.

Frame: Pressed steel basket.

Voice Coil: 2 inch (50.8 mm) coated copper.

Magnet: 34 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 53 Hz

Qms = 8.14

Vas = 60.1 liters

Xmax = 3 mm

Sd = 344.9 sq.cm




Qes = 0.52



Re = 5.75 ohms

Le = 0.67 mH

Z = 8 ohms

Pe = 250 watts

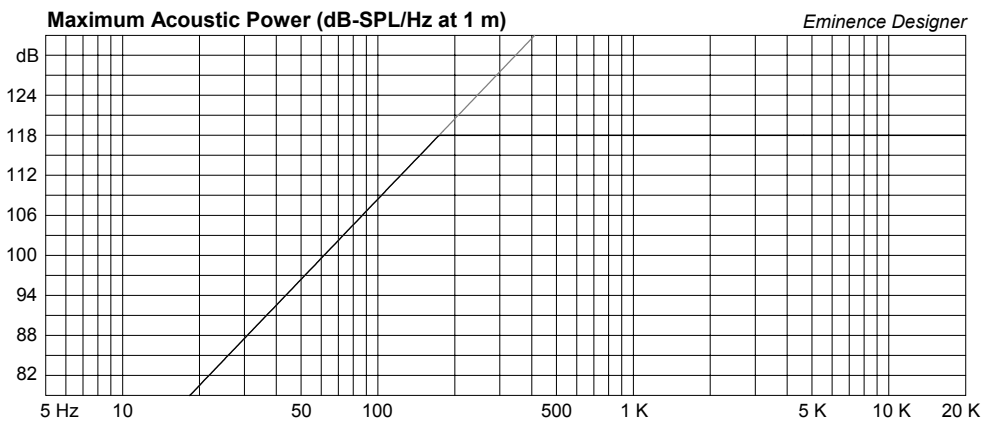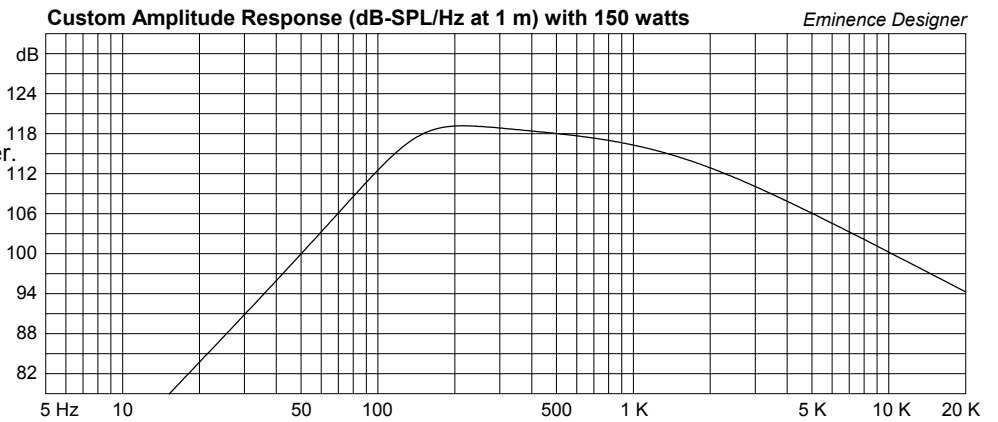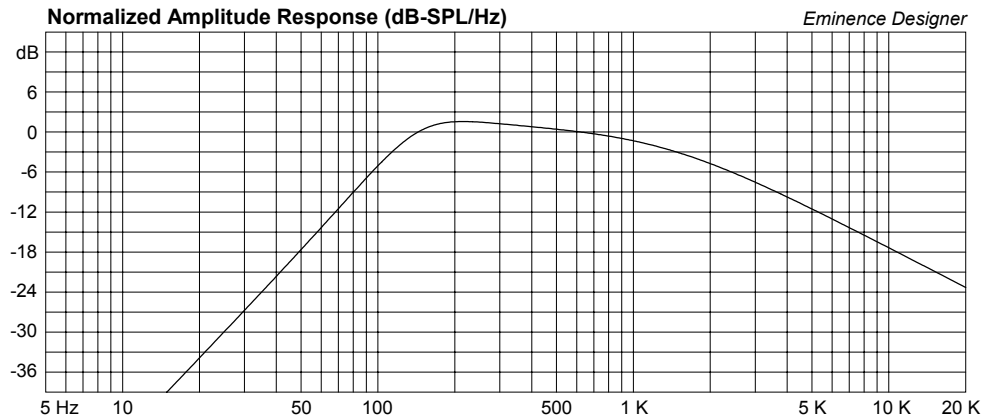

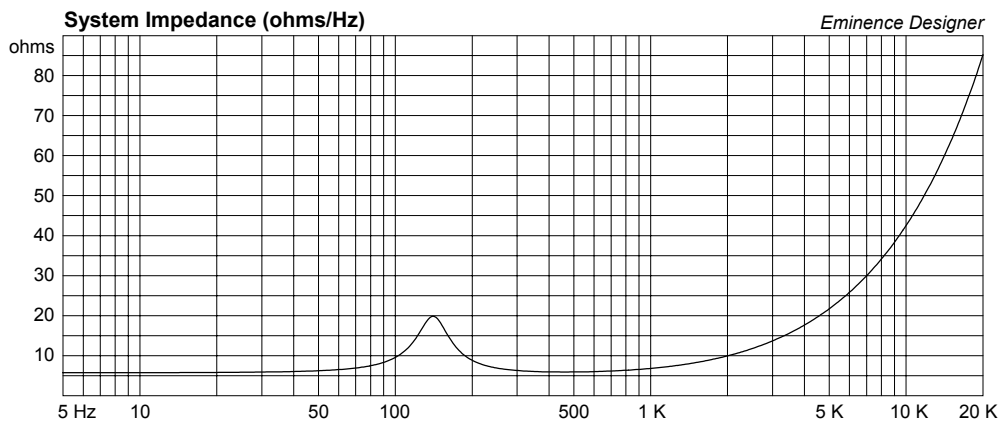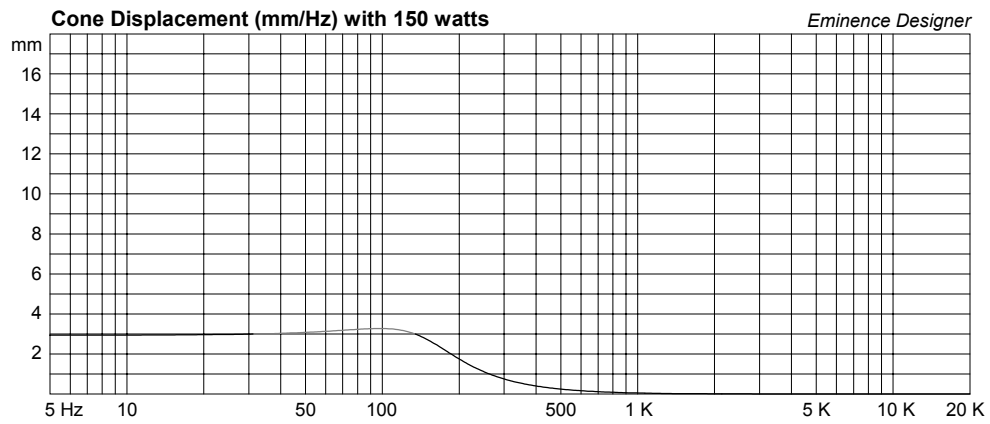

Beta10A Sm Vented Mid/High or Low Pwr Public Address

By Jerry McNutt, Eminence Speaker LLC

High Power Mid/High Cabinet: 250 Watt Thermal limit; use above 200 Hz.

Public Address (Semi-Full Range): 100 Watt Displacement Limit; use above 80 Hz

Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square (optimum)

--Box Parameters--

Vb = 0.7 cu.ft

V(total) = 0.757 cu.ft

Fb = 65.39 Hz

QL = 7

F3 = 79.76 Hz

Fill = minimal

--Vents--

No. of Vents = 1

Vent shape = round

Vent ends = one flush

Dv = 3 in

Lv = 3.62 in

Driver Properties

--Description--

Name: Beta-10 (8 ohm)

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised Sep-2002

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid paper dust cap.

Frame: Pressed steel basket.

Voice Coil: 2 inch (50.8 mm) coated copper.

Magnet: 34 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 53 Hz

Qms = 8.14

Vas = 60.1 liters

Xmax = 3 mm

Sd = 344.9 sq.cm




Qes = 0.52




Re = 5.75 ohms

Le = 0.67 mH

Z = 8 ohms

Pe = 250 watts

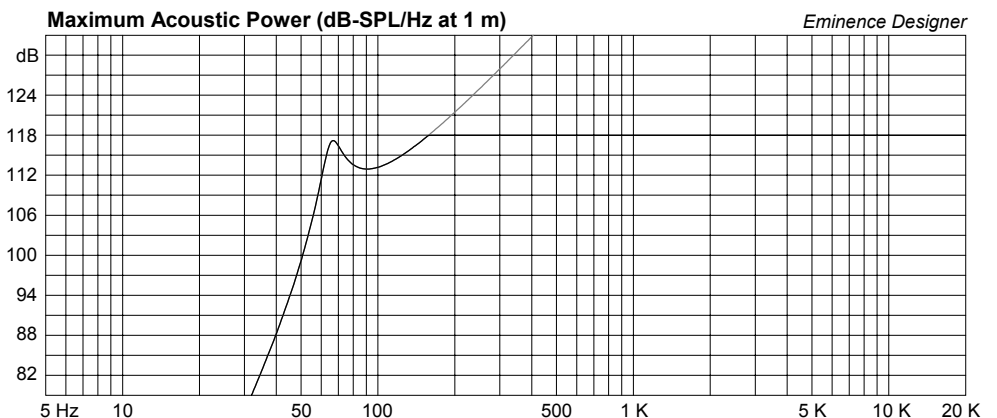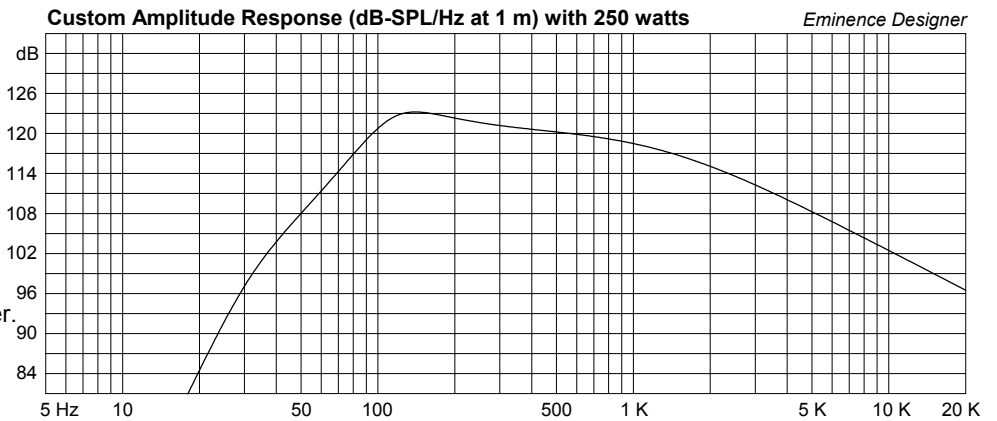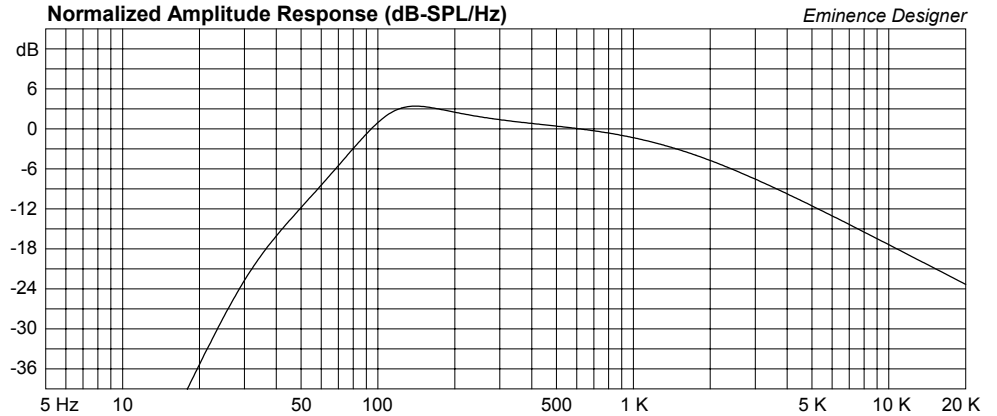

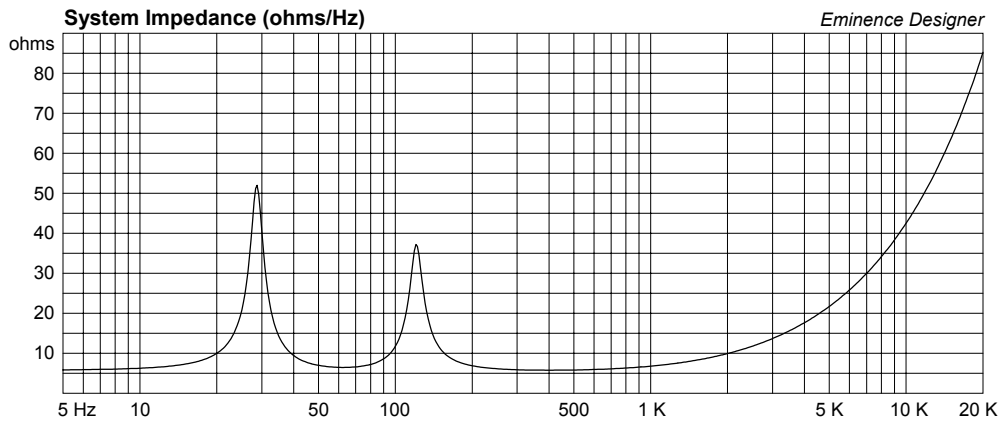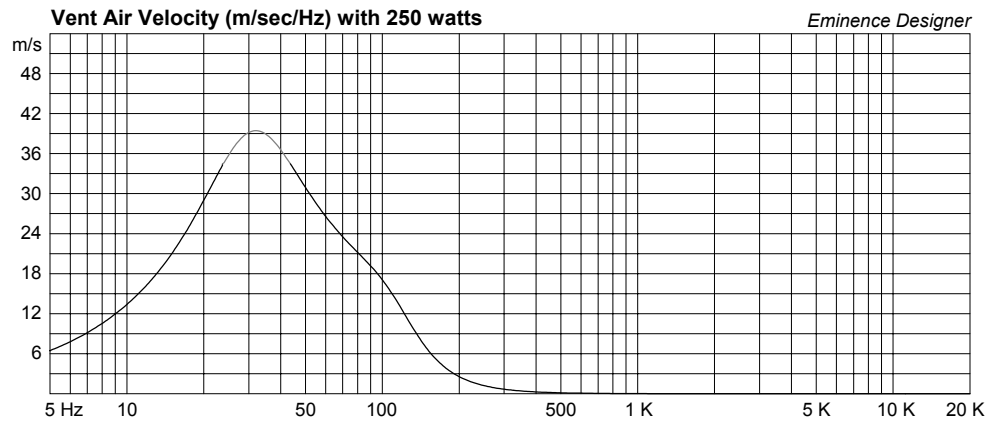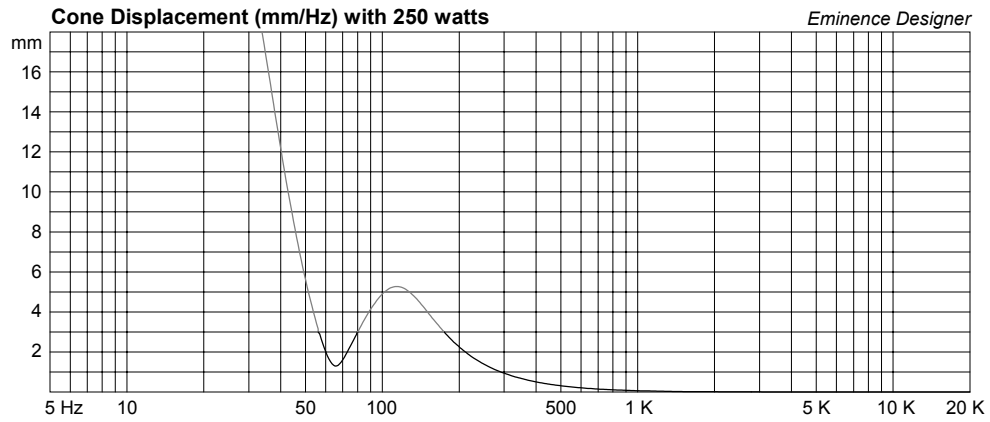

Beta10A Med Vented Cab, Bass Guitar/ Low Pwr FR

By Jerry McNutt, Eminence Speaker LLC
Displacement limited to 50 Watts; F3 51 Hz.

Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square (optimum)

--Box Parameters--

Vb = 2.1 cu.ft

V(total) = 2.166 cu.ft

Fb = 55 Hz

QL = 7

F3 = 51.41 Hz

Fill = minimal

--Vents--

No. of Vents = 2

Vent shape = round

Vent ends = one flush

Dv = 3 in

Lv = 2.67 in

Driver Properties

--Description--

Name: Beta-10 (8 ohm)

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised Sep-2002

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid composition paper dust cap.

Frame: Pressed steel basket.

Voice Coil: 2 inch (50.8 mm) coated copper.

Magnet: 34 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 53 Hz

Qms = 8.14

Vas = 60.1 liters

Xmax = 3 mm

Sd = 344.9 sq.cm

Qes = 0.52

Re = 5.75 ohms

Le = 0.67 mH

Z = 8 ohms

Pe = 250 watts

