

DeltaPro12 Larger Vented Cab, Med Pwr, Full Range Use

By McJerry, Eminence Speaker LLC

Displacement limited to 150 watts. Must use a 24 dB per octave high pass filter set to 50 Hz or higher to protect woofer from overexcursion. Very flat response.

Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square (optimum)

--Box Parameters--

Vb = 3 cu.ft

V(total) = 3.139 cu.ft

Fb = 55 Hz

QL = 7

F3 = 51.53 Hz

Fill = minimal

--Vents--

No. of Vents = 2

Vent shape = round

Vent ends = one flush

Dv = 4 in

Lv = 3.006 in

Driver Properties

--Description--

Name: Delta Pro-12

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised NOV 2005

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid paper dust cap.

Frame: Diecast aluminum basket.

Voice Coil: 2.5 inch (63.5 mm) copper.

Magnet: 80 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 51 Hz

Qms = 7.56

Vas = 81.7 liters

Xmax = 4.55 mm

Sd = 532.4 sq.cm




Qes = 0.37




Re = 5.71 ohms

Le = 0.84 mH

Z = 8 ohms

Pe = 400 watts

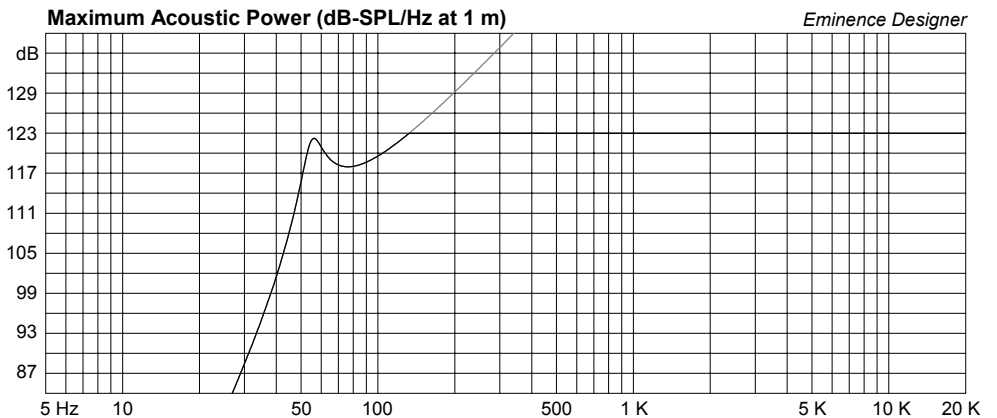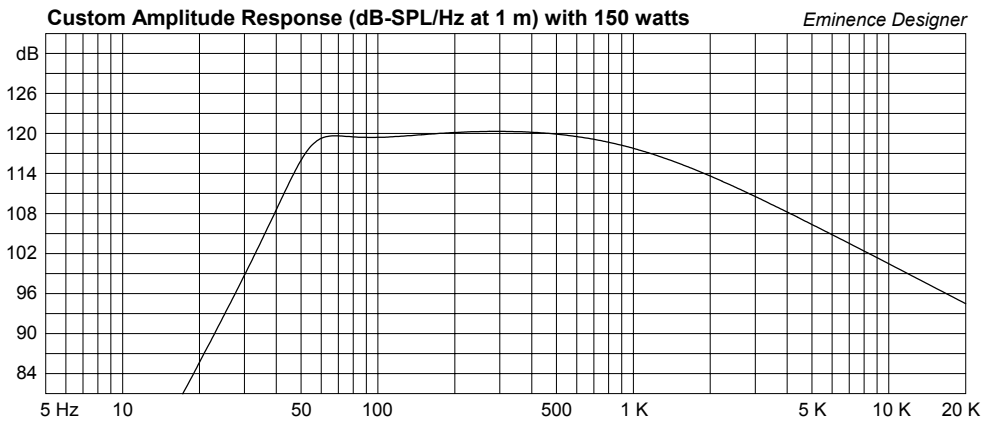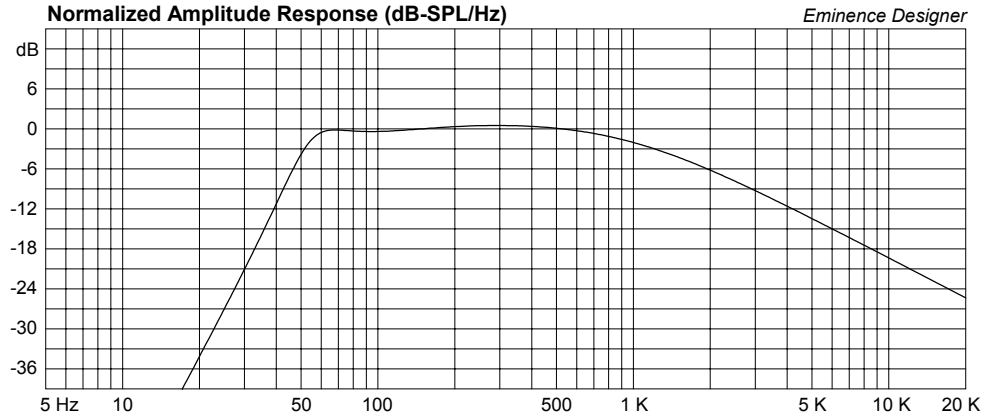

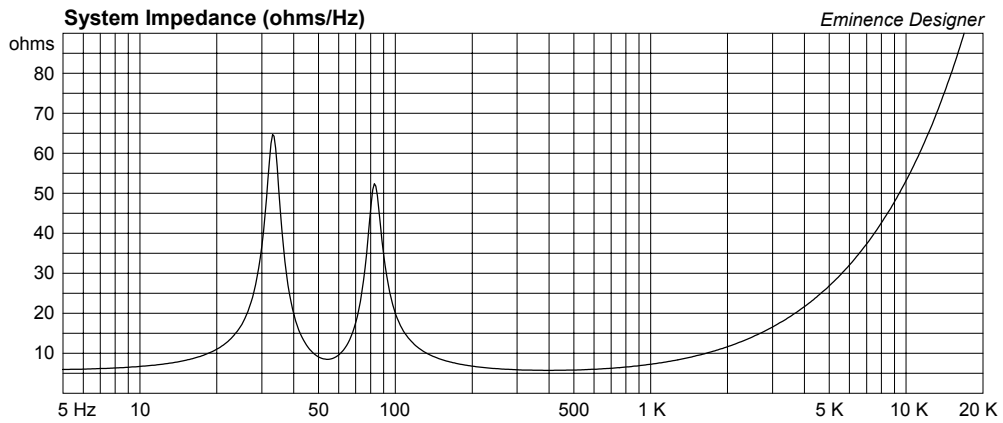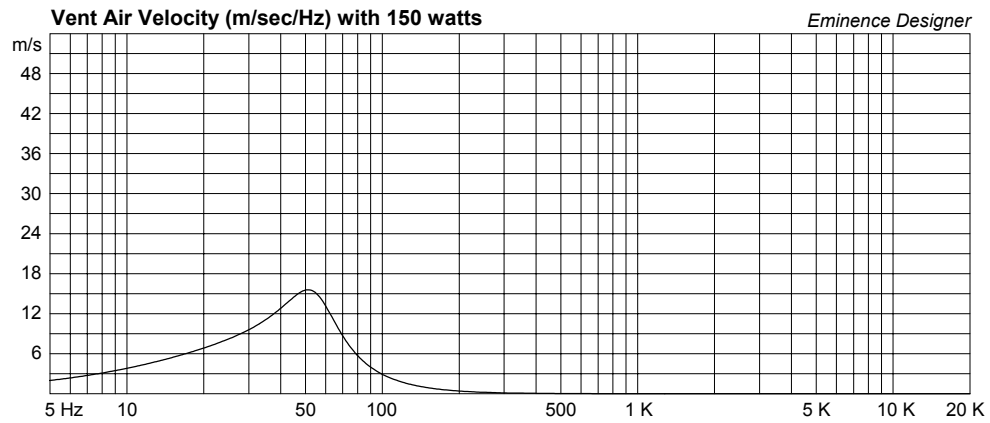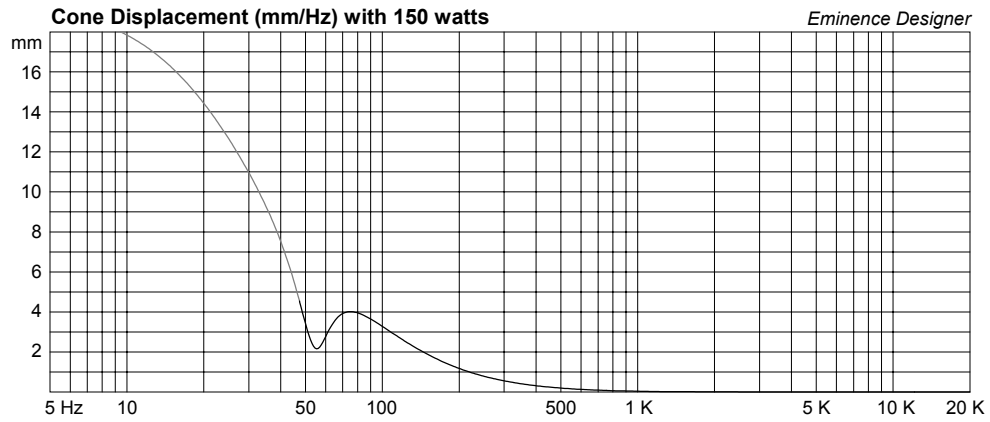

DeltaPro12 Med Vented Cab, Mid/High, or Floor Monitor

By McJerry, Eminence Speaker LLC

Displacement limited to 350 watts. Must use a 24 dB per octave high pass filter set to 70 Hz or higher to protect woofer from overexcursion.

Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square (optimum)

--Box Parameters--

Vb = 2 cu.ft

V(total) = 2.1 cu.ft

Fb = 75 Hz

QL = 7

F3 = 65.99 Hz

Fill = minimal

--Vents--

No. of Vents = 2

Vent shape = round

Vent ends = one flush

Dv = 3.575 in

Lv = 0.75 in

Driver Properties

--Description--

Name: Delta Pro-12

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised NOV 2005

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid paper dust cap.

Frame: Diecast aluminum basket.

Voice Coil: 2.5 inch (63.5 mm) copper.

Magnet: 80 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 51 Hz

Qms = 7.56

Vas = 81.7 liters

Xmax = 4.55 mm

Sd = 532.4 sq.cm




Qes = 0.37




Re = 5.71 ohms

Le = 0.84 mH

Z = 8 ohms

Pe = 400 watts

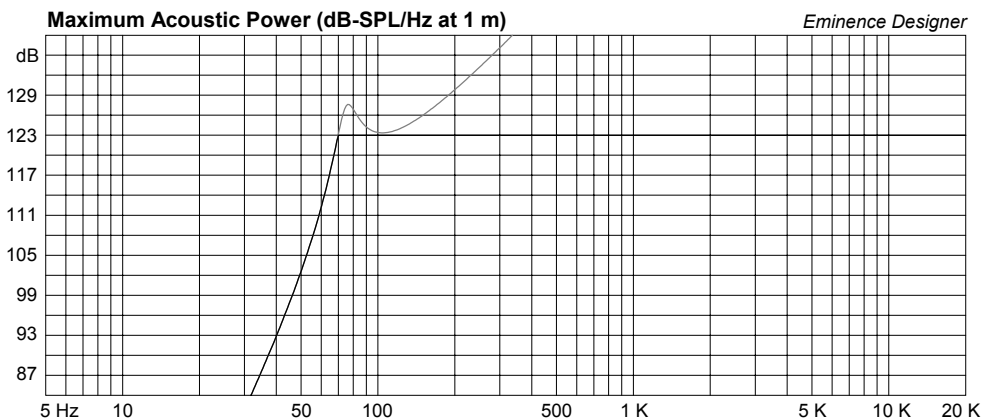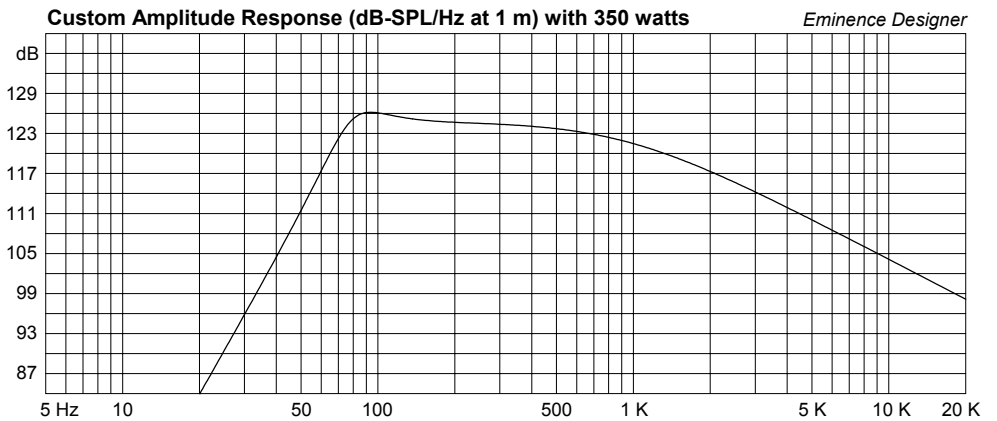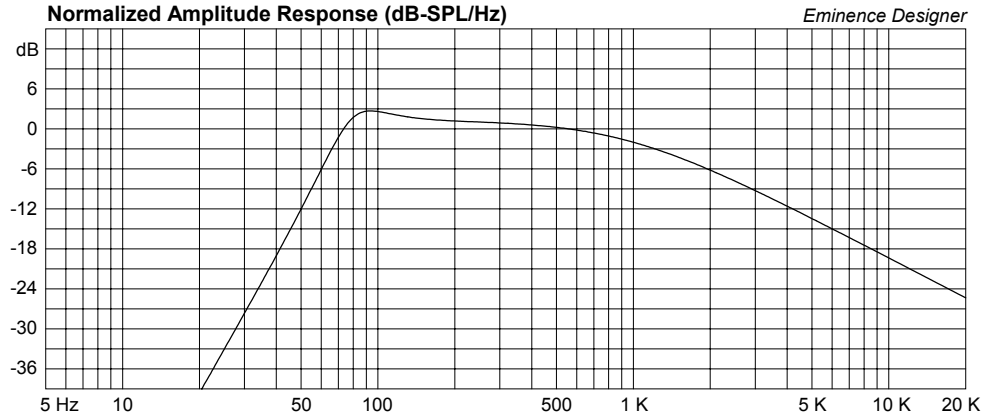

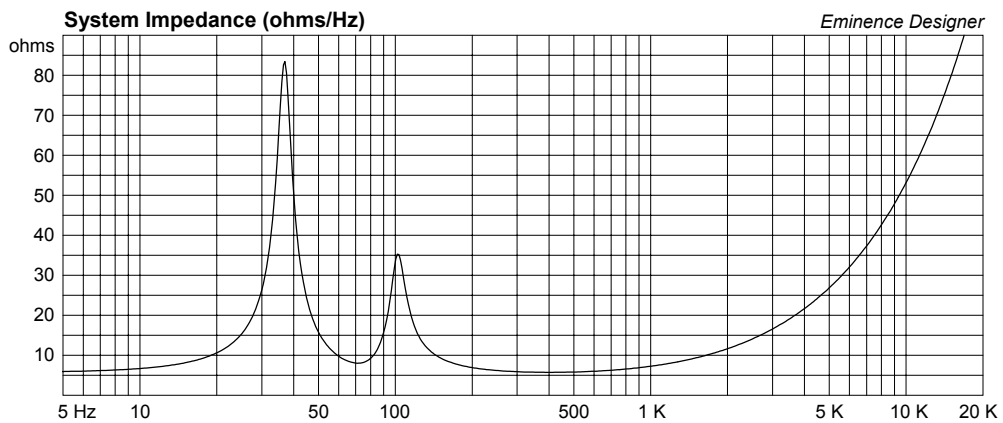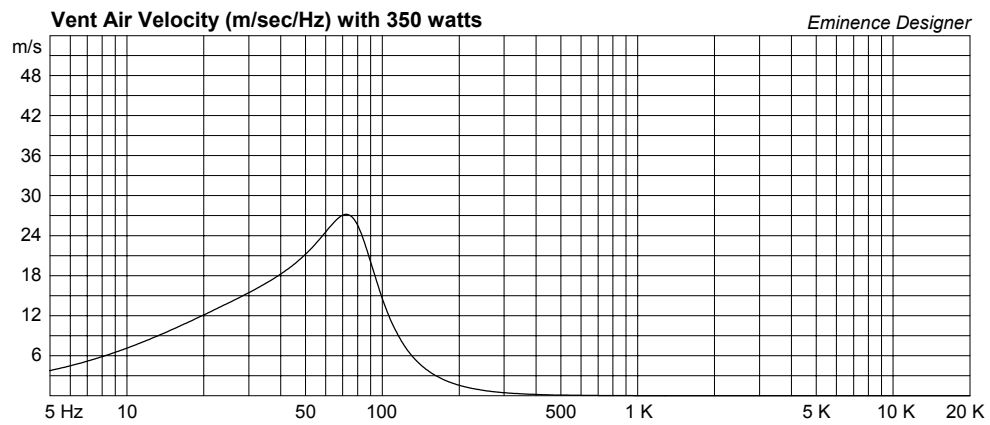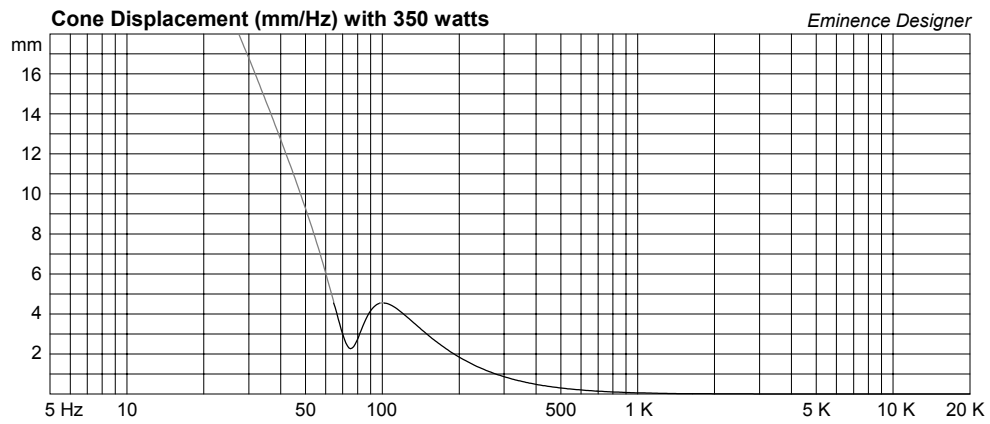

DeltaPro12 Small Mid/Hi Sat Box, or Hi Pwr Floor Wedge

By McJerry, Eminence Speaker LLC

Displacement and thermally limited to 400 watts. Must use a 24 dB per octave high pass filter set to 100 Hz or higher to protect woofer from overexcursion. Great for a 12" two-way mid/high or a hi-power floor monitor.

Box Properties

--Description--

Name:

Type: Vented Box

Shape: Prism, square (optimum)

--Box Parameters--

Vb = 1 cu.ft

V(total) = 1.14 cu.ft

Fb = 95 Hz

QL = 7

F3 = 85.7 Hz

Fill = minimal

--Vents--

No. of Vents = 2

Vent shape = round

Vent ends = one flush

Dv = 4 in

Lv = 3.049 in

Driver Properties

--Description--

Name: Delta Pro-12

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised NOV 2005

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid paper dust cap.

Frame: Diecast aluminum basket.

Voice Coil: 2.5 inch (63.5 mm) copper.

Magnet: 80 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 51 Hz

Qms = 7.56

Vas = 81.7 liters

Xmax = 4.55 mm

Sd = 532.4 sq.cm




Qes = 0.37




Re = 5.71 ohms

Le = 0.84 mH

Z = 8 ohms

Pe = 400 watts

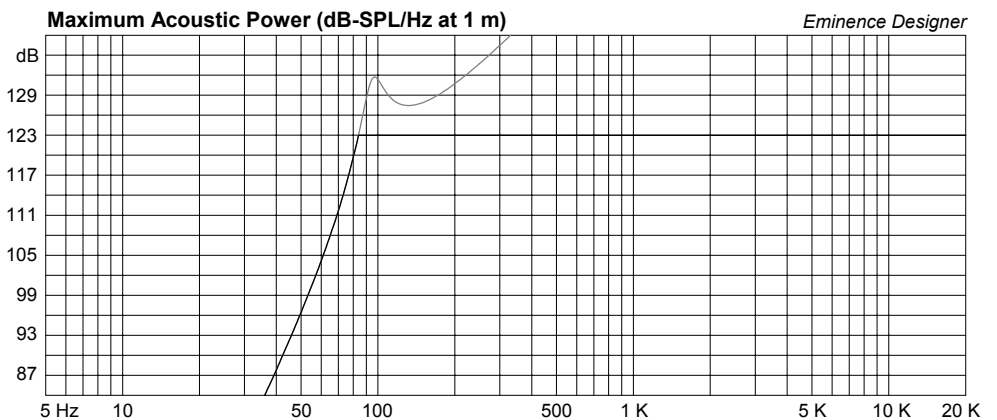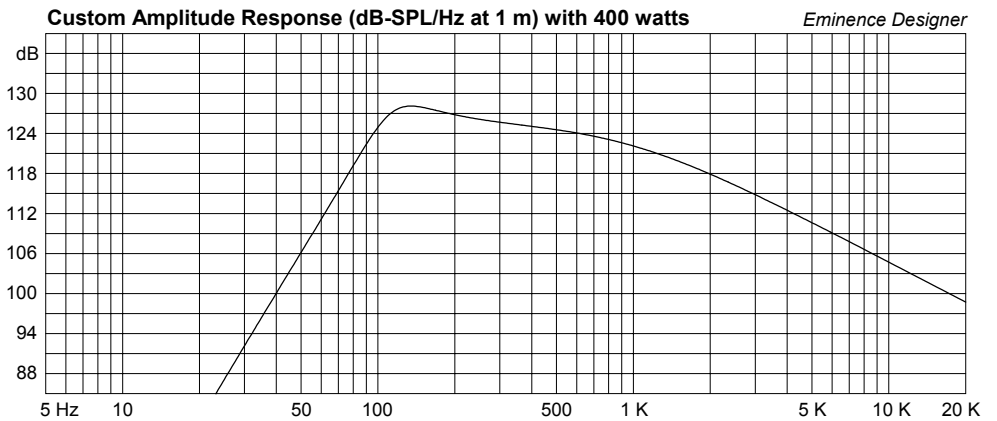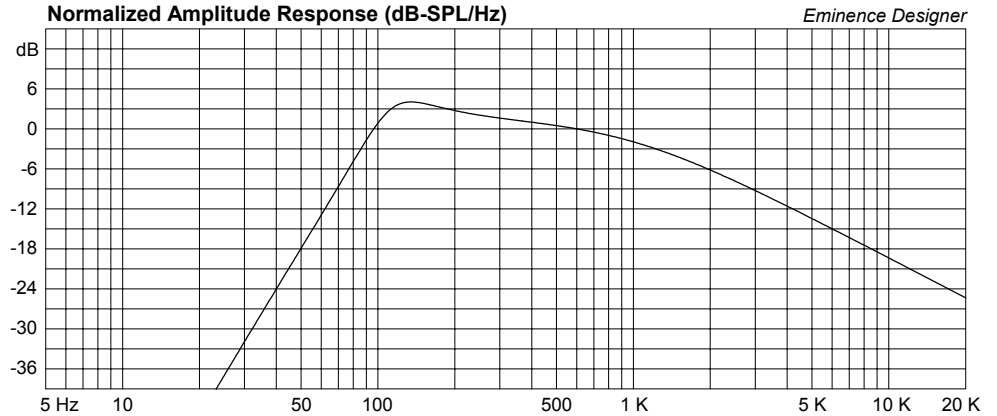

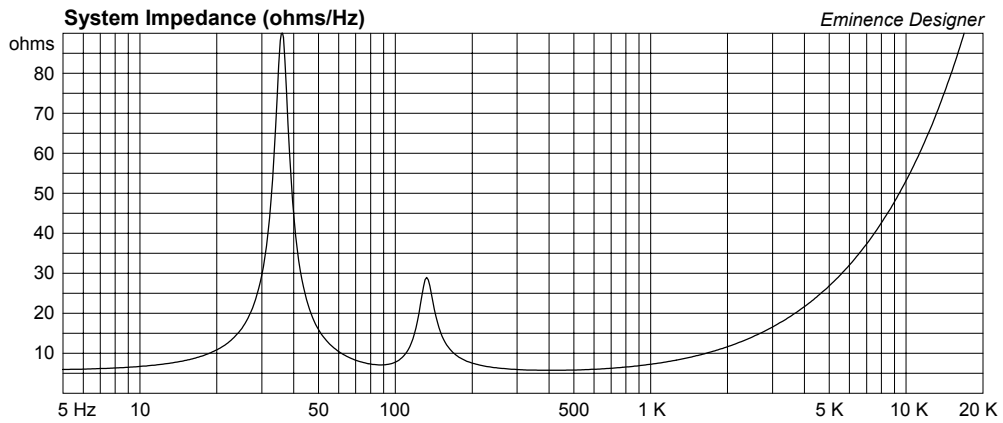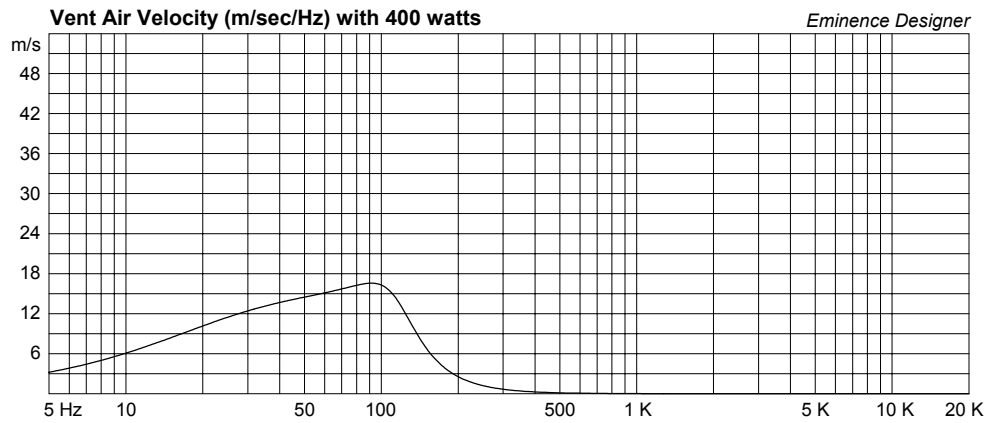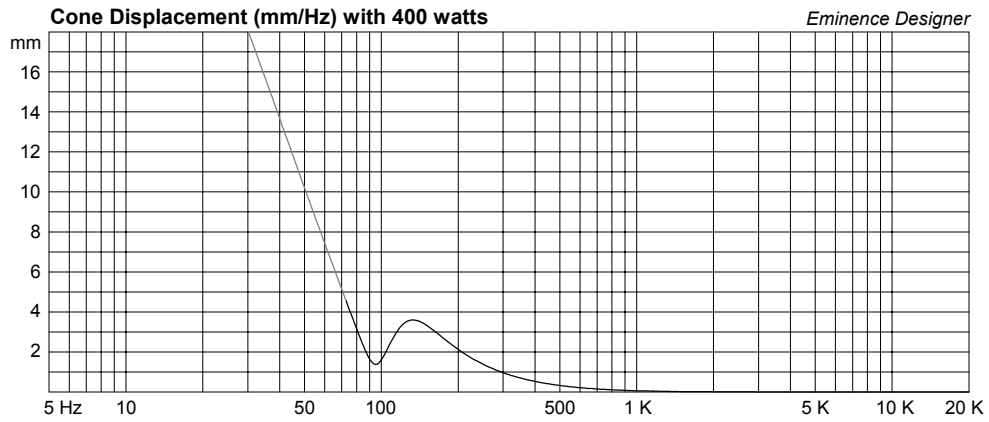

DeltaPro12 Small Sealed Cab, Hi Pwr Midrange, or Vocal Wedge

By McJerry, Eminence Speaker LLC

Limited to 300 Watts; use a steep high pass filter set to 150 Hz or higher.

Box Properties

--Description--

Name:

Type: Closed Box

Shape: Prism, square

--Box Parameters--

Vb = 1 cu.ft

V(total) = 1.09 cu.ft

Qtc = 0.556

QL = 20

F3 = 119.2 Hz

Fill = heavy

Driver Properties

--Description--

Name: Delta Pro-12

Type: Standard one-way driver

Company: Eminence Speaker LLC

Comment: Revised NOV 2005

Piston: Paper cone.

Suspension: Cloth surround.

Dust Cap: Solid paper dust cap.

Frame: Diecast aluminum basket.

Voice Coil: 2.5 inch (63.5 mm) copper.

Magnet: 80 oz ferrite magnet.

--Configuration--

No. of Drivers = 1

--Driver Parameters--

Fs = 51 Hz

Qms = 7.56

Vas = 81.7 liters

Xmax = 4.55 mm

Sd = 532.4 sq.cm

Qes = 0.37

Re = 5.71 ohms

Le = 0.84 mH

Z = 8 ohms

Pe = 400 watts

