


PX 110

Project Series

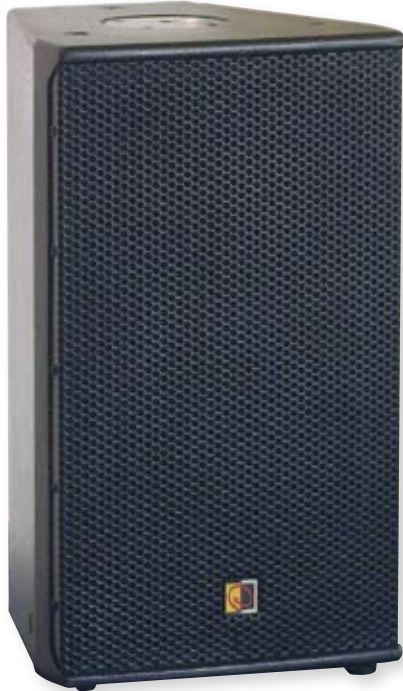

PX110

PX110

The AUDAC PX110 cabinet is a compact, full range loudspeaker designed to be used especially in small and medium fixed indoor installations.

It delivers a clear and natural sound.

The loudspeaker has a 10" cone driver and a 1" HF driver with a coverage pattern of 90° x 60° and is designed to work vertically as well as horizontally. Average power handling is 350W.

On-axis frequency range is 80 Hz to 18 kHz.

On-axis sensitivity (1W/1m) is 98 dB SPL and even reaches a maximum SPL of 120 dB.

The PX series have a MDF wooden enclosure with scratch free, durable structure black painting and ergo grips.

The PX110 is provided with an internal speaker pole flange adapter for easy installation and setup and with 10 flying points for M10 eye bolts.

The PX110 can be mounted on a wall or ceiling using the optional MBK110 wall bracket.

To protect the speakers during transportation and use, the CPB110P bag cover is available for PX110 speaker cabinets.

FEATURES :

High-fidelity, full range reproduction of music and speech

High efficiency horn loading

Application-specific coverage pattern

APPLICATIONS :

Full range speaker cabinet for indoor project use



PX110 rear



PX110 fly points



PX110 grip

About Audac :

AUDAC provides a complete range of audio equipment such as amplifiers, loudspeakers, microphones, conference microphones and much more.

PX 110

speaker cabinet

PROFESSIONAL SOUND EQUIPMENT

AUDAC
www.audac.eu

PRODUCT FEATURES :

Drivers : HF	1"
MF	10"
Dimensions (BxHxD)	315 x 325 x 545 mm
Weight Net	15.5 kg
Connectors	Speakon ML4MPX2
Construction	Medium density wood with textured polyurethane
Fittings : Handles	1 (at the back)
front finish	perforated steel grille
Flying points	6 double M10
Stand fittings	1

SYSTEM SPECIFICATIONS :

RMS Power	180W
Max Power	350W
Impedance	8 Ohm
Sound pressure 1W/1m	1W/1m 98 dB
Max Sound pressure	120 dB
Horizontal coverage	90°
Vertical coverage	60°
Frequency response -3 db	80 - 18.000 Hz
-10 db	65 - 20.000 Hz
Crossover freq.	2.500 Hz


SYSTEM OPERATION :

Electronic controller	Multifunctional mid high enclosure for various applications
-----------------------	-------------------------------------------------------------

SHIPPING & ORDERING :

Packaging	carton box
Shipping weight and volume	40 kgr/pair - 0.20 Cbm
Accessories	L-mounted wall bracket protection bag. eye bolt

* AUDAC reserves the right to change specifications without notice: this is part of our policy to continually improve our products.

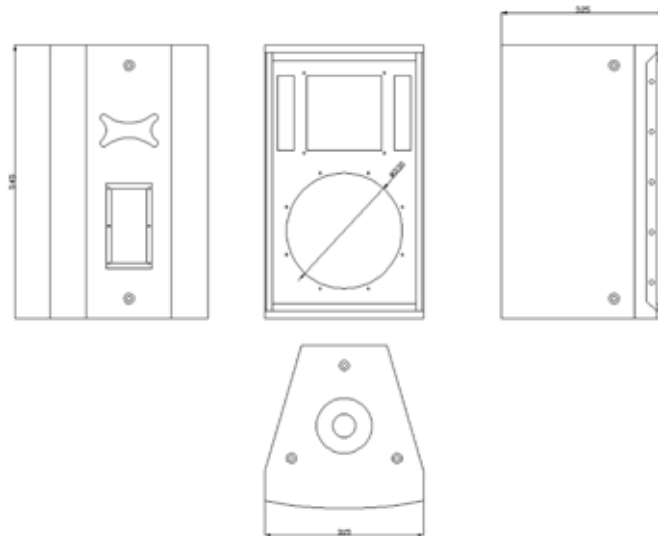

For a period of 2 years, starting from the original date of purchase, Audac products are covered against defects in workmanship or materials. The defective item will be repaired or replaced at the option of Audac, with no charge for materials or labour. You have to adequately pack up and dispatch the item prepaid to an Audac authorized distributor/service centre. Unauthorized repair shall void the warranty. Cosmetics and finish are not covered by this Audac warranty. The warranty is also voided if, in Audac's opinion, the items have failed due to user abuse, accidents, modifications or any type of misuse.

