

SX 415

Subwoofer System



FEATURES :

Powerful sub system (126 db SPL MAX)
15" excursion driver

Sophisticated control electronics ensure
reliable, linear operation

Integral 35 mm pole mount that supports mid-high
loudspeaker.

APPLICATIONS :

High power touring, installed PA for clubs,
A/V, theatre, broadcast, etc.

SX415

AUDAC's SX series subwoofers are crafted, based on the need for a powerful bass reproduction without any loss of clarity or sound quality.

To accomplish these needs, AUDAC decided to use a Tandem ported design. The results of the carefully designed and tuned subwoofer, are that the SX subwoofers are capable of a high power low frequency sound with exceptionally low distortion levels and a flat frequency response between 45 and 250 Hz.

Accurate bass does not always sound spectacular, it sounds real.

A really good sub will integrate so seamlessly into your system that it will not draw attention to itself.

The AUDAC SX 415 is a powerful Tandem Ported Design subwoofer for indoor applications.

This single 15" subwoofer is good for 500 Watt RMS Power and 99 dB SPL sensitivity and is capable of a maximum SPL of 126 dB, with a flat frequency response between 45 - 250 Hz and a slide boost on 100 Hz. This sound is perfect for all sorts of disco music, rap, hip-hop and punk. Its built-in head base makes it possible to combine with any top cabinet of your choice.

The cabinet is constructed of 18 mm multi-ply hardwood and coated with scratch free, durable structure black paint.



solid grip

About Audac :

AUDAC provides a complete range of audio equipment such as amplifiers, loudspeakers, microphones, conference microphones and much more.

SX 415

subwoofer system

PROFESSIONAL SOUND EQUIPMENT

AUDAC
www.audac.eu

PRODUCT FEATURES :

| | |
|--------------------|--|
| Drivers | 1x15" |
| Dimensions (BxHxD) | 430 x 650 x 800 mm |
| Weight Net | 43 kg |
| Connectors | ML4MPX2 |
| Construction | birch with textured polyurethane black coating |
| Fittings : Handles | 2, integrated to cabinet |
| front finish | perforated steel grille |
| Flying points | none |
| Stand fittings | built-in stand fitting, 35mm |


SYSTEM SPECIFICATIONS :

| | |
|--------------------------|-------------|
| RMS Power | 500W |
| Max Power | 1.000W |
| Impedance | 8 Ohm |
| Sound pressure 1W/1m | 99 dB |
| Max Sound pressure | 126 dB |
| Frequency response -3 db | 45 - 250 Hz |
| -10 db | 35- 250 Hz |

SHIPPING & ORDERING :

| | |
|----------------------------|-------------------|
| Packaging | carton box |
| Shipping weight and volume | 48 kgr - 0.30 Cbm |
| Accessories | none |

* AUDAC reserves the right to change specifications without notice: this is part of our policy to continually improve our products.

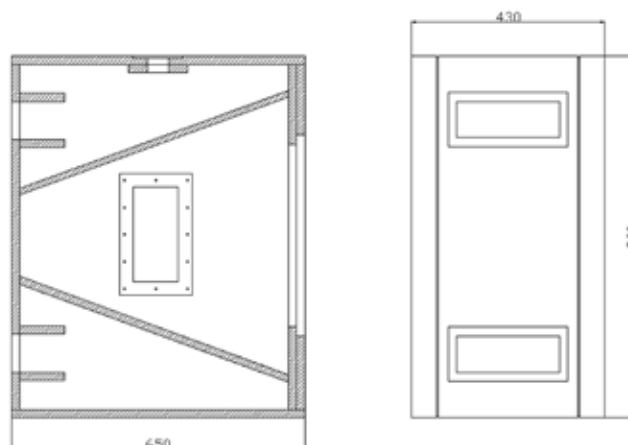

For a period of 2 years, starting from the original date of purchase, Audac products are covered against defects in workmanship or materials. The defective item will be repaired or replaced at the option of Audac, with no charge for materials or labour. You have to adequately pack up and dispatch the item prepaid to an Audac authorized distributor/service centre. Unauthorized repair shall void the warranty. Cosmetics and finish are not covered by this Audac warranty. The warranty is also voided if, in Audac's opinion, the items have failed due to user abuse, accidents, modifications or any type of misuse.

