



SyncMaster 460UX/460UXn

imagine captivating your audience

With millions of people passing through airports every year, they have become one of the busiest places in the world. Air travelers tend to be a sophisticated audience and can spend hours in airports prior to departure and on arrival. And that could be a perfect opportunity to speak to this highly-lucrative audience. Introducing the Samsung SyncMaster 460UX/UXn. A powerful display tool that's designed to garner attention and produce brilliant images in a larger-than-life format. With the capability to produce high-quality images, a built-in network module and its expansion capabilities, this is the LFD you've been waiting for. To learn more, please visit www.samsung.com




SAMSUNG SyncMaster 460UX/460UXn

Samsung LFD (Large Format Display) Monitor

Command your audience's attention

Helping you to deliver a high-impact message is what the Samsung SyncMaster 460UX/UXn is all about. The ultra-slim design makes it ideal for video wall displays, while the built-in network module provides for easier control and overall management. Plus, its highly reliability and the unparalleled picture performance produces the clear and high-quality images you've come to expect from Samsung.

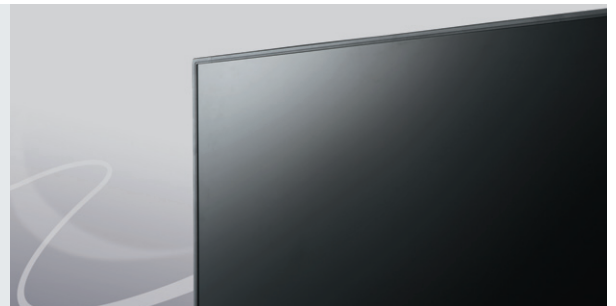

LFD0808L01-H1-Q-000

Key Features

Eye-catching design

Capturing your audience's attention is critical. That begins with the LFD's eye-catching images but extends to its sleek, sophisticated design. At 11mm, the ultra-slim, metal-finished bezel of the LFD will be sure to catch anyone's attention—even when it's turned off.

Enhanced networking capabilities

The built-in network module on the LFD monitor provides you with another layer of convenience. The module allows for easy networking for greater efficiency and overall performance. Plus, some models come with our easy-to-use content management software, MagicInfo, designed to help you get up and running quickly.

Increased connectivity

The LFD delivers an increased amount of versatility with its wide variety of connectivity options. From PC to Video inputs, to a convenient remote control, your LFD has the ability to expand with your business needs.

Stunning, high-quality images

Designed with performance in mind, the Samsung LFD is built with the Samsung DID panel and its unique DNle technology, allowing it to produce crisp, clear images under any lighting condition. And with a brightness level of 700cd/m² and a 2,000:1 contrast ratio, the Samsung LFD will produce large-than-life images from any angle.

Highly reliable

Samsung's LFDs are designed to last. The LFDs come fully equipped with special protective features such as temperature sensors and fans to defend against overheating and powerful anti-image retention features to prevent burnt in images.

Multi-display screen

The multi-display screen (MDC) program enables you to control a variety of different sources through the built-in RS-232C interface. So connecting your Samsung LFD to devices such as a network of PCs allows for an easy exchange of data and information.

Long Cable Compensation

Available with an analog cable compensation of up to 100m, the Samsung LFD can be placed in almost any position.


Intelligent power saving

Samsung's unique Dynamic Contrast (DC) technology greatly reduces power consumption across the entire network, lowering your overall cost of operation.

Specifications

Model		460UX	460UXn
Panel	Diagonal Size	46" (16:9)	
	Type	S-PVA(DID)	
	Resolution	1366 x 768	
	Brightness(Typ.)	700cd/m ²	
	Contrast Ratio	2,000:1	
	Dynamic C/R	5,000:1	
	Viewing Angle(H/V)	178/178	
Connectivity	Response Time(G-to-G)	8ms	
	PC inputs	VGA/DVI/BNC	
	Video Inputs	CVBS/S-Video/Componet/HDMI	
	Speaker	N/A	
Power	Power Consumption	270W(Max)	340W(Max)
	Power Consumption at Stand-by(Max)	1W(Energy Saving ON) 2W(Energy Saving OFF)	1W(Energy Saving ON) 5W(Energy Saving OFF)
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
Mechanical Spec	VESA Mount	600x400mm	
	Weight (Set/Package)	27.7/32.2	29/33.5
Operation	Dimension	1049x603x118	
	Packing Dimension	1155x733x325	
	Operating Temperature	10°C~ 40°C	
Feature	Humidity	10~80%	
	Special Features	Bezel-less Frame Lamp Error Detection Temperature Sensor Built in Fan Video Wall, RS232C	
Network	Operating System	N/A	Window XP Embedded
	CPU		AMD Dual Core Processor
	FDM		4GB
	Memory		DDR2 512MB / 1G
	USB		3 USBs
	Ethernet		Marvell 88E8055 Gigabit LAN
	VGA Out		N/A
Optional Item	Wall Mount	WMTL-5770D	
	Vertical Mount	WMTL-5770D	
	Ceiling Mount	CML500D	
	Semi-Stand	STN-L3257D	
Accessories	Manuals	Quick Setup Guide, Warranty Card, Application CD	
	Cables	D-Sub, Power Cord, Speaker Wire	
	Others	Remote Controller, BNC to RCA Jack, Batteries, Stand Hold Cover	

Dimensions 460UX/460UXn (unit:mm)

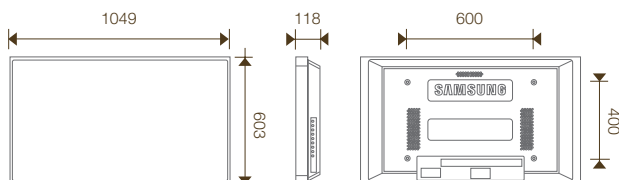

* Design and Specifications are subject to change without notice.

Distributed by:

