

FLEX ARRAY ENGINEERING INFORMATION

Flex Array series is a high performance modular loudspeaker system designed for use in a variety of medium scale line array or virtual point source sound reinforcement activities ranging from theatres and live music venues to concert touring, festivals, corporate events and regional tours.

The **TFA-600BDP** is a compact self-powered horn loaded bass enclosure designed to be ground stacked with Flex Array TFA-600HDP mid/highs. It consists of a single 18" neodymium low frequency driver loaded with a TurboBass device in a birch plywood cabinet together with an integrated Class D amplifier module.

The proprietary 18" drive unit's magnet system drives a dual-spider split 4" voice coil which allows continuous BL (magnetic force) with displacement, ensuring optimum control from the motor assembly and very low harmonic distortion even at the excursion limits. The 4" coil also results in a lower system moving mass than equivalent 5" units, resulting in higher sensitivity and

exceptional response to fast transient peaks.

The TFA-600BDP features a new generation of innovative lightweight Class D amplifiers, utilising revolutionary 96kHz DSP technology to give operating efficiency in excess of 90%. A Neutrik™ Powercon connector provides mains input and 3-pin XLR's are used for input and parallel link signal connections. RJ45 network connectors enable multiple loudspeakers to be controlled and monitored over a BVNet network using TurboDrive™ software.

The enclosure integrates easily into a ground stack of Flex Array TFA-600LDP cabinets. A pole mount socket is fitted for use with flying yokes.

The 15mm birch plywood cabinet is equipped with recessed handles on the sides and back, and is supplied with heavy duty wheels in order to aid trucking and handling.




FEATURES

- High definition bass
- Digitally self-powered
- 139dB max output
- Compact enclosure
- Neodymium drive unit
- Pole mount socket

APPLICATIONS

- House of Worship
- Ground-stacked touring
- Theatre and corporate
- Live music venues
- Dance clubs

DIMENSIONS (HxWxD)	574mm x 710mm x 848mm (22.6" x 28" x 33.4")
COMPONENTS	1 x custom 18" (457mm) LF driver
FREQUENCY RESPONSE	38Hz - 150Hz \pm 3dB, 30Hz - 150Hz \pm 10dB Recommended operational range below 250Hz
CALC. MAXIMUM SPL	Single enclosure: 133dB continuous (calculated SPL addition), 139dB peak
AMPLIFIER	TYPE: Class D inc SMPA and networked DSP POWER OUTPUT: 1600 watts continuous @ 8 ohms (1kHz, 0.01% THD) DYNAMIC RANGE: 110dB INPUT CLIP: 10dBu BANDWIDTH: 20Hz - 20kHz \pm 0.5dB POWER REQUIREMENTS: 100V to 240V AC @ 50/60Hz
CONSTRUCTION	15mm (5/8") birch plywood throughout; heavily braced, rebated, screwed and glued. Finished in black semi-matt textured paint. Eight recessed carrying handles.
GRILLE	2mm powder coated perforated mild steel backed with reticulated foam
SPARES AND ACCESSORIES	LS-1815 18" (457mm) LF loudspeaker RC-1815 Recone kit MG-600L Replacement metal grille T4 wheels Heavy duty wheels

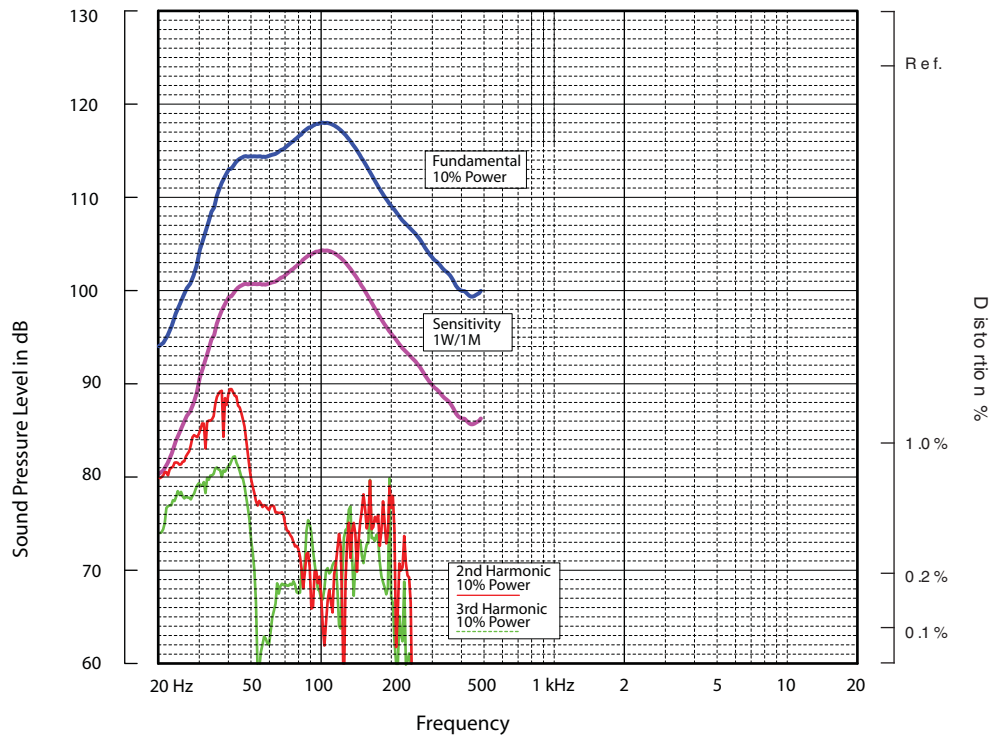

FREQUENCY RESPONSE

**ARCHITECTURAL
& ENGINEER'S
SPECIFICATIONS**

The system shall be of the self-powered horn-loaded subwoofer type consisting of one 18" (457mm) low frequency driver together with an integrated Class D amplifier module with DSP. Performance specifications of a typical production unit shall meet or exceed the following:- Frequency response, measured with a swept sine wave input shall be flat within $\pm 3\text{dB}$ from 38Hz to 150Hz, and within $\pm 10\text{dB}$ from 30Hz to 150Hz. Maximum SPL (peak), measured with music program shall be 139dB. Dimensions: 574mm x 710mm x 848mm (22.6" x 28" x 33.4"). The loudspeaker system shall be the Turbosound TFA-600BDP. No other system shall be acceptable unless the above combined performance specifications are equalled or exceeded. Flying and installation hardware shall be available comprising a range of load-certified components.

DIMENSIONS

