


AT 480-R

4 Channel Audio Transformer



Main Features

- AT480-R is a versatile and reliable multi-channel audio transformer.
- Very compact case and slim design, the best in fixed installation with very small spaces, for multi-zone infrastructures.
- High Quality toroidal transformers guarantee low distortion, high bandwidth and full galvanic isolation between the audio sources and the 100V speaker lines.
- Low impedance audio inputs in removable Phoenix connectors.
- 100V line outputs on removable Phoenix connectors.
- 4x100W@100V line outputs.
- Two patch cord to connect the AT480-R to the DA480-R are supplied in the package.
- Half single 19" rack unit fully compatible with the InOut RM30 and FP30 rack accessories.
- AT480-R can be also used stand-alone.

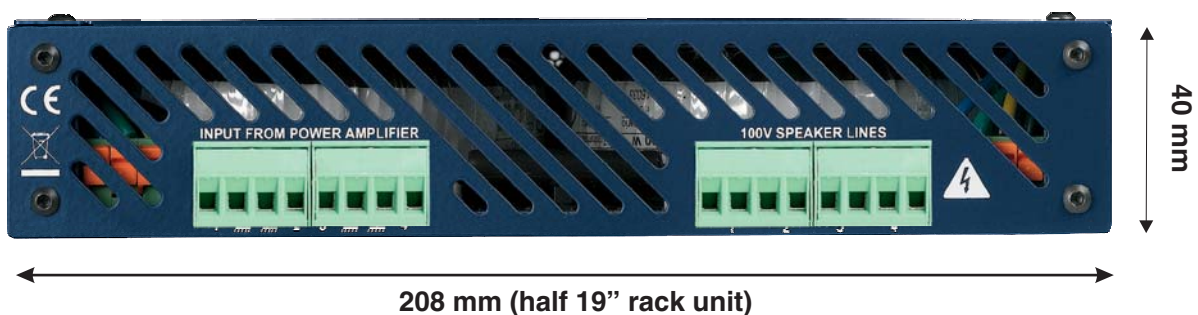

Technical Characteristics

- Number of channels: 4
- Input impedance: 4ohms
- Output power: 4x100W
- Output voltage: 100V
- Frequency response: 90Hz - 20Hz \pm 1.5dB
- High-pass filter: 40Hz - 3dB
- Size: 40mm H x 208mm W x 200mm D
- Half single 19" rack unit fully compatible with the InOut RM30 and FP30 rack accessories.
- Weight: 4,4 Kg

DA 480-R AT 480-R connection

