

BenQ


MP776/777

Digital Projector



HIGHLIGHTS

- Filter Free Design
- No Color Decay
- Crestron/PJLink Compatible
- 3500/4000 ANSI Lumens
- XGA Native Resolution
- BrilliantColor™
- 3D Color Management
- VIDI
- 6 Segments Color Wheel
- Auto Keystone
- Keystone ± 40 Degree
- 5W x 2 Speakers
- Variable Audio Out
- Closed Captioning
- HDMI v1.3
- Multi Languages Web Control
(English/French/German/Italian/Japanese/Spanish/Simplified Chinese/Traditional Chinese)

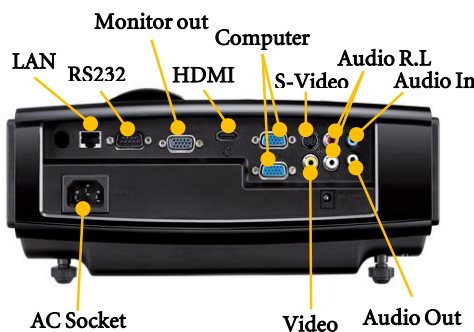

Projection System	DLP® technology by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Brightness	3500/4000 ANSI lumens	
Contrast Ratio	4000:1 (Full on/Full off)	
Keystone	Auto Keystone Vertical ± 40 Degree; Manual Vertical ± 40 Degree	
Aspect Ratio	4:3 Native, 16:9 Selectable	
Color	Full 16.7 million color palette	
Lens	F=2.59~2.87	
Zoom Ratio	Manual Zoom, 1.3:1	
Image Size (Diagonal)	25" to 300"	
Throw Ratio	1.51 to 1.96:1 (65"@2M)	
Lamp	280W, 3000/4000 hours (Normal/Economic mode)	
Computer Compatibility	VGA(640 x 480) to UXGA (1600x1200)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-93 kHz	
Vertical Scan Rate	48-86 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 2 HDMI V1.3 x 1
	A/V	S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1
	Audio	Audio L/R : RCA x 2 Stereo Mini Jack x 1
Output Terminals	PC	D-sub 15 pin x 1 Variable Audio Out : Stereo Mini Jack x 1 12 V Trigger
	Audio	5W x 2
Control Terminal	Serial Connector : RS232 x 1 RJ45 x 1	
Dimensions(W x H x D)	11.4 x 3.7 x 9.9 inch (290 x 94 x 252 mm)	
Weight	7.7 lbs (3.5 kg)	
Power Supply	100 to 240 VAC, 50/60 Hz	
Power Consumption	425W, Standby < 1W	
Audible Noise	34/29 dB (Normal/Economic mode)	
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Hungarian/ Italian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (24 Languages)	
Picture Modes	PC Input:	A/V Input :
	Dynamic Mode Presentation Mode sRGB Mode Cinema Mode User 1 Mode User 2 Mode	Dynamic Mode Presentation Mode sRGB Mode Cinema Mode User 1 Mode User 2 Mode
Functions	BrilliantColor	Freeze
	VIDI	Blank
	3D Color Management	Panel Key Lock
	Crestron LAN Control	Auto Off
	Emergency Broadcasting	Security Password
	Multi Languages Web Control	HDTV compatible
	Auto Keystone	High altitude mode
	Digital Zoom (x2)	"Q?" Hot Key for FAQ
	Variable Audio Out	3D Ready
	Quick Cooling	PJLink Compatible
	Closed Captioning	Quick Auto Search
	Accessories (Standard)	Quick Start Guide
Accessories (Optional)	Manual CD	Power cord
	Remote control w/battery	Soft carry case
	Presentation Plus	Spare Lamp Kit
	RS232 Cable	